


Time Delay Values

TRIP TIME (SECONDS)	PERCENT OF RATED CURRENT									
	100%	125%	135%	150%	200%	400%	600%	800%	1000%	1200%
	No Trip	7.00 - 100	---	3.00 - 50.0	1.10 - 18.0	.220 - 3.00	.120 - 1.70	.075 - 1.20	.050 - .850	.042 - .720

Notes:

- 1) Breakers to hold 100% and must trip at 125% of rated current and greater within the time limit shown in this curve.
- 2) Curve data shown represents breaker response at ambient temperature of 77°F (25°C) with no preloading. Breakers are mounted in standard wall-mount position.
- 3) The current ratings, the minimum inrush pulse tolerance handling capability is 12 times the rated current on standard delays and 25 times the rated current on high inrush delays.
- 4) These values are based on a 60Hz 1/2 cycle, 8.33 ms pulse. High inrush delays should be specified for applications with high initial surge currents of short duration such as switching power supplies, highly capacitive loads and transformer loads.

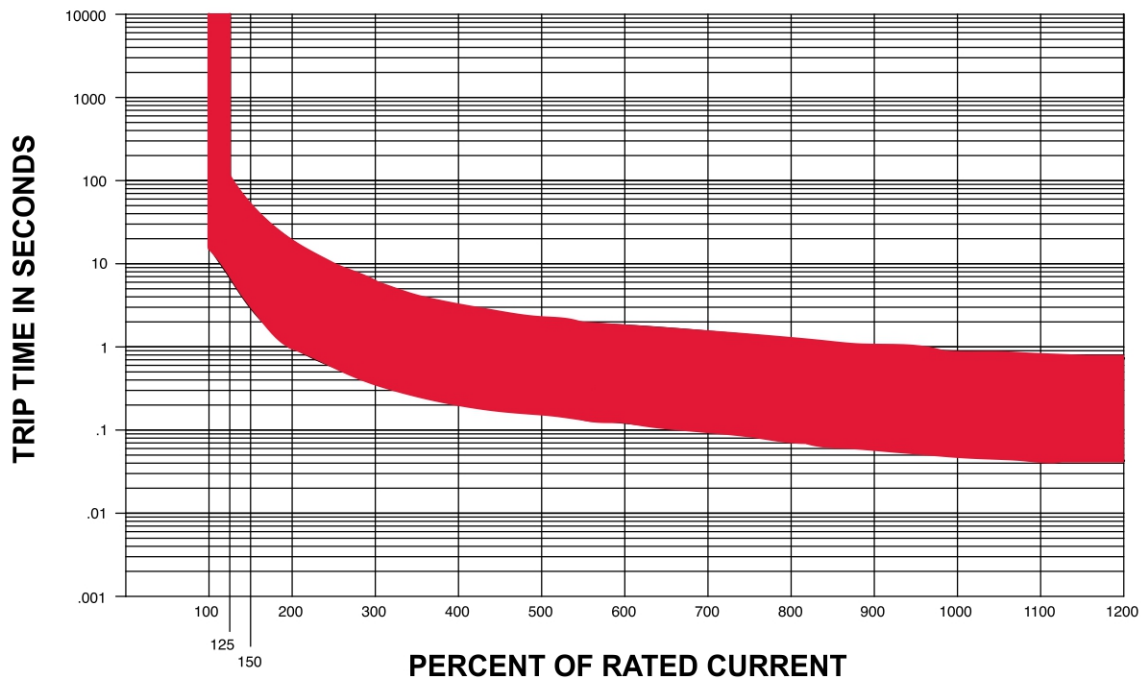

Pulse Tolerance Curves

